
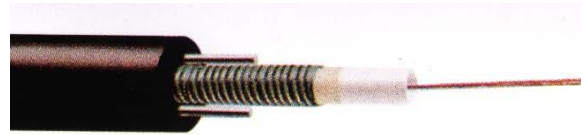


Fiber Optics Cables - 4 fiber - Multimode - OM2 50/125 - Outdoor (Armor) - Steel Corrugated Tape armouring with PE outer jacket.

MODEL: GYXTW0450P

Description & Construction

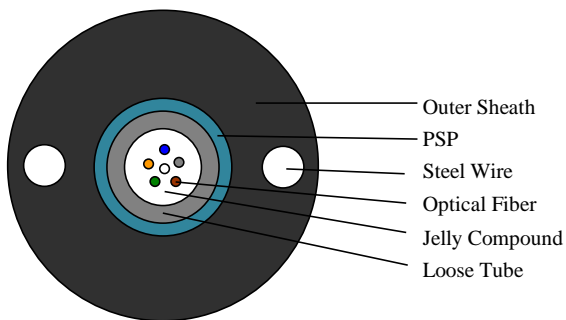

- Single jelly compound filled loose tube containing up to 24 fibers
- Waterproof tape between the steel tape and loose tube with jelly compound
- Double-sided PE corrugated steel tape armored
- Parallel double steel wire as strength member
- Compact structure, light weight, steel tape armored excellent crush-resistant performance
- Excellent water-proof layer, good moisture resistance

Applications

- Suitable for ducts and aerial.
- Long distance communication system.
- Local area network system.
- Subscriber network system.

Fiber Optics Cables - 4 fiber - Multimode - OM2 50/125 - Outdoor (Armor) - Steel Corrugated Tape armouring with PE outer jacket.

MODEL: GYXTW0450P

Physical & Environmental Characteristics

| | |
|-------------------------|--------------|
| ▶ Operation temperature | -40 °C~60 °C |
| ▶ Jacket Material | PE |
| ▶ Fiber Count | 4 |
| ▶ Outside Diameter(mm) | 8.0+0.5mm |
| ▶ L.T. Diameter(mm) | 1.9 |
| ▶ Cable Weight (kg/km) | 70.0 |

Specifications

| | | |
|----------------|-------|------|
| ▶ Tensile Load | S(N) | 1500 |
| | L(N) | 600 |
| ▶ Crush Load | S(N) | 1000 |
| | L(N) | 300 |
| ▶ Bend Radius | S(mm) | 20D |
| | L(mm) | 10D |

Fiber Colour Code:

| | | |
|------------|-----------|------------|
| BL- Blue | BR- Brown | RE- Red |
| OR- Orange | GY- Grey | BK- Black |
| GR- Green | WH- White | YE- Yellow |
| PU- Purple | PI- Pink | AQ- Aqua |

Ordering Information:

Model: GYXTW0450P

- GY: outdoor cable; X: central tube; T: jelly compound; W: steel wire.
- 04 denotes fiber count
- 50 denotes 50: 50/125
- P denotes PE sheath