


Patch cord - Cat 6A - UTP - 24AWG - 500MHz - Black

MODEL: CMS-C6AU-BK-X

Cross - Section View

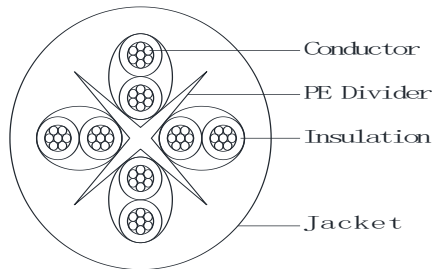

Description & Features

01. Conductor: Material : 24AWG BC
Construction : 7/0.20±0.008mm (pcs/mm)
Diameter : 0.60mm
02. Insulation: Material : HD-PE
Ave. Thickness : 0.19 mm
Color code & diameter
- Blue×White/Blue Orange×White/Orange - 0.98±0.05mm
- Green×White/Green Brown×White/Brown - 0.98±0.05mm
03. Divider: Material : PE
04. Jacket: Material : 45P 60°C PVC
Avg.Thickness : 0.50 mm
Overall Diam. : 6.0±0.2mm
Color: Bk、YL071、RD038、BL120


Ordering Information:

Model: CMS-C6AU-BK-X

- X denotes length.

CMS-C6AU-BK-0.5M	Patch cord 0.5m- Cat 6A - UTP - 24AWG - 500MHz - Black
CMS-C6AU-BK-1M	Patch cord 1m - Cat 6A - UTP - 24AWG - 500MHz - Black
CMS-C6AU-BK-2M	Patch cord 2m - Cat 6A - UTP - 24AWG - 500MHz - Black
CMS-C6AU-BK-3M	Patch cord 3m- Cat 6A - UTP - 24AWG - 500MHz - Black
CMS-C6AU-BK-5M	Patch cord 5m- Cat 6A - UTP - 24AWG - 500MHz - Black
CMS-C6AU-BK-10M	Patch cord 10m- Cat 6A - UTP - 24AWG - 500MHz - Black

REV	Des.	DATE
A	new item	2024-8-11

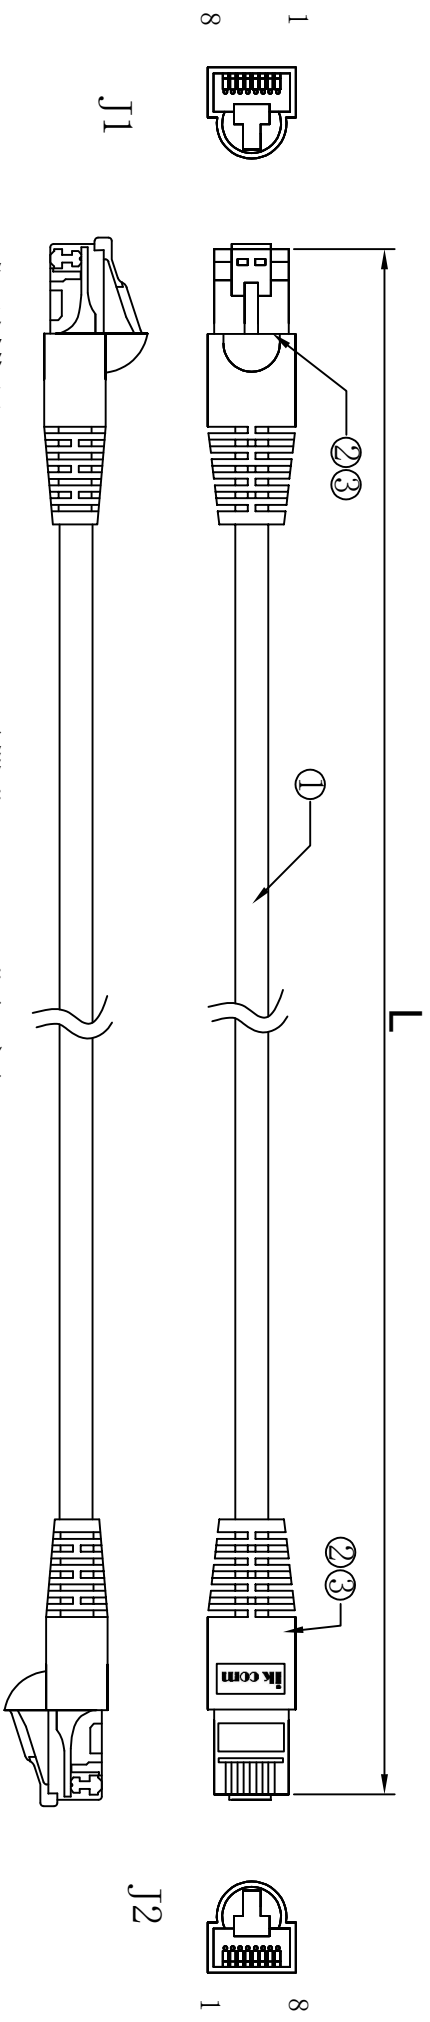


成型模具：LT-P-018/022(帶“**ik.com**”印字)

568B-568B PIN

J1	COLOR	J2
1	(橙白) ORANGE/WHT	1
2	(橙) ORANGE	2
3	(綠白) GREEN/WHT	3
4	(藍) BLUE	4
5	(藍白) BLUE/WHT	5
6	(綠) GREEN	6
7	(棕白) BROWN/WHT	7
8	(棕) BROWN	8

L	WRAP	PE BAG
500 ± 10MM	上三下一	0.06*150*200MM
1000 ± 15MM	上三下二	
2000 ± 20MM	上五下四	0.06*180*230MM
3000 ± 30MM	上八下七	
5000 ± 50MM	上十三下十二	0.06*220*260MM
10000 ± 100MM	绕线外径160MM	
15000 ± 150MM	绕线外径160MM	

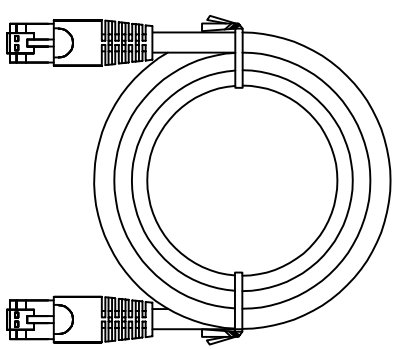

NOTES : UNLESS OTHERWISE SPECIFIED

1	印字：“IK△COM△4PR△24AWG△UTP△G1GA-PATCH△CABLE△FTL△VERIFIED△T1A-568-C.2 △CAT.6A△500MHZ△(WW/YY)”UTP C6A 24AWG, Stranded PVC, L=0.5-5M	1PCS
2	8P8C R 50U” C6A PLUG	2PCS
3	BLACK/RED/YELLOW/BLUE 50P PVC	適量
4	LABLE 75*50MM	
5	CARTON SIZE 39*29*29cm	

COUSTOMER (客戶)	P-001	COUSTOMER P.N (客戶料號)	ONS-C6AU-**-**M	PROPORTION (尺寸比例)	1:1
DESCRIPTION (品名)	IK.com UTP C6A	LT P.N (良泰料號)		UNITS (長度單位)	mm
Tolerances: .XX±0.1 .X±0.5 .±5 angles-±1°				INSPECT BY (審查)	
				APPROVAL BY (核准)	