


# Patch cord - Cat 6 - UTP - 24AWG - 250MHz - Black

MODEL: CMS-C6U-BK-X

## Cross - Section View

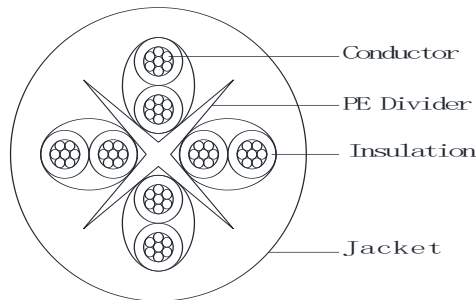

## Description & Features

01. Conductor:                      Material : 24AWG BC  
    Construction : 7/0.20±0.008mm (pcs/mm)  
    Diameter : 0.60mm
02. Insulation:                     Material : HD-PE  
    Ave. Thickness : 0.19 mm  
    Color code & diameter  
    - Blue×White/Blue Orange×White/Orange - 0.98±0.05mm  
    - Green×White/Green Brown×White/Brown - 0.98±0.05mm
03. Divider:                        Material : PE
04. Jacket:                         Material : 45P 60°C PVC  
    Avg.Thickness : 0.50 mm  
    Overall Diam. : 6.0±0.2mm  
    Color: Black

### Ordering Information:


Model: CMS-C6U-BK-X

- X denotes length.

CMS-C6U-BK-0.5M	Patch cord 0.5m- Cat 6 - UTP - 250MHz - Black
CMS-C6U-BK-1M	Patch cord 1m- Cat 6 - UTP - 250MHz - Black
CMS-C6U-BK-2M	Patch cord 2m- Cat 6 - UTP - 250MHz - Black
CMS-C6U-BK-3M	Patch cord 3m- Cat 6 - UTP - 250MHz - Black
CMS-C6U-BK-5M	Patch cord 5m- Cat 6 - UTP - 250MHz - Black
CMS-C6U-BK-10M	Patch cord 10m- Cat 6 - UTP - 250MHz - Black
CMS-C6U-BK-15M	Patch cord 15m- Cat 6 - UTP - 250MHz - Black

產品工程圖

REV	Updates	Date
B	Add 15m	2020-03-06

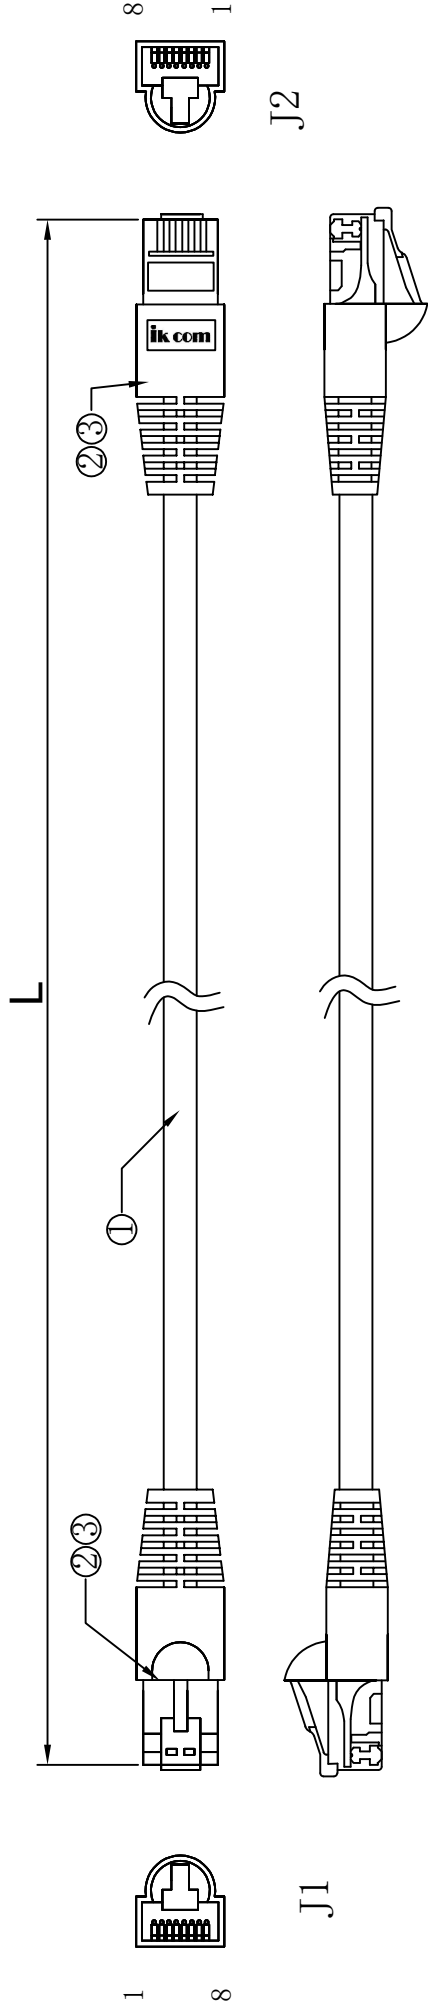


MOULD: LT-P-018/022 (WITH "ik.com" LOGO)

568B-568B PIN

J1	COLOR	J2
1	(橙白) ORANGE/WHT	1
2	(橙) ORANGE	2
3	(綠白) GREEN/WHT	3
4	(藍) BLUE	4
5	(藍白) BLUE/WHT	5
6	(綠) GREEN	6
7	(棕白) BROWN/WHT	7
8	(棕) BROWN	8

L	WRAP	PE BAG
500 ± 10MM	上二下一	0.06*150*200MM
1000 ± 15MM	上三下二	0.06*180*230MM
2000 ± 20MM	上五下四	0.06*220*260MM
3000 ± 30MM	上八下七	0.06*260*300MM
5000 ± 50MM	上十三下十二	
10000 ± 100MM	绕线外径160MM	
15000 ± 150MM	绕线外径160MM	

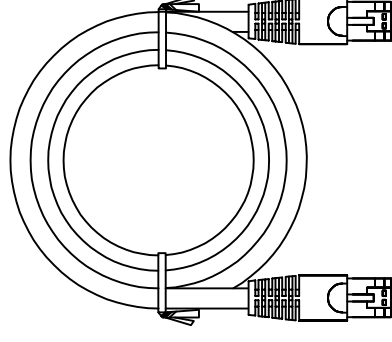

NOTES: UNLESS OTHERWISE SPECIFIED

1	Printing: "IK△COM△4PR△24AWG△UTP△GIGA-PATCH△CABLE△ETL△VERIFIED△TIA-568 -C.2△CAT.6△250MHZ△(ww/yy)" UTP C6 24AWG, Stranded PVC, L=0.5-15M	1PCS
2	8P8C R 50U" C6 PLUG	2PCS
3	BLACK 50P PVC胶料	適量
4	LABLE 75*50MM	
5	CARTON SIZE 39*29*29cm	

COUSTOMER (客戶)	P-001	COUSTOMER P.N (客戶料號)	CMS-C6U-BK-**M	PROPORTION (尺寸比例)	1:1
DESCRIPTION (品名)	ik.com UTP C6	LT P.N (良泰料號)		UNITS (長度單位)	mm
			DRAWN BY (製圖)		
			INSPECT BY (審查)		
			APPROVAL BY (核准)		
			Tolerances: .XX ± 0.1 .X ± 0.5 angles ± 1°		